

ROTATOR FR10.0 F2



100
kN

50
kN

2800
Nm

64
kg

30
l/min








FHL02

← OPPOSITE HOSE CONNECTION



DOUBLE BEARING

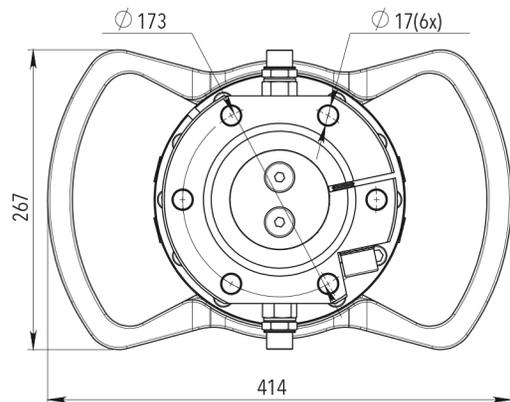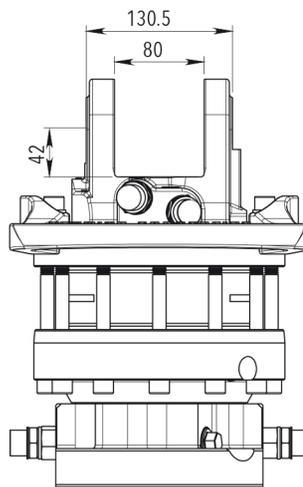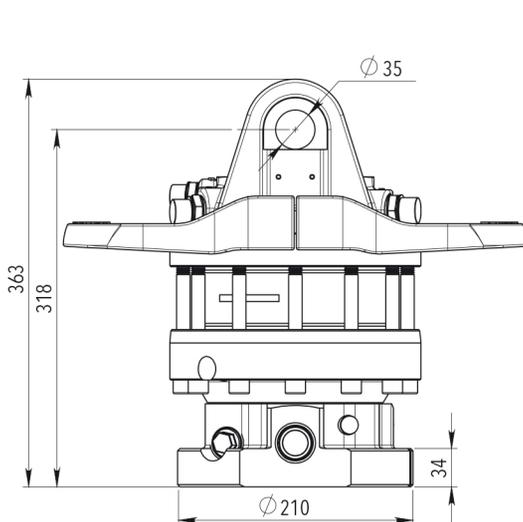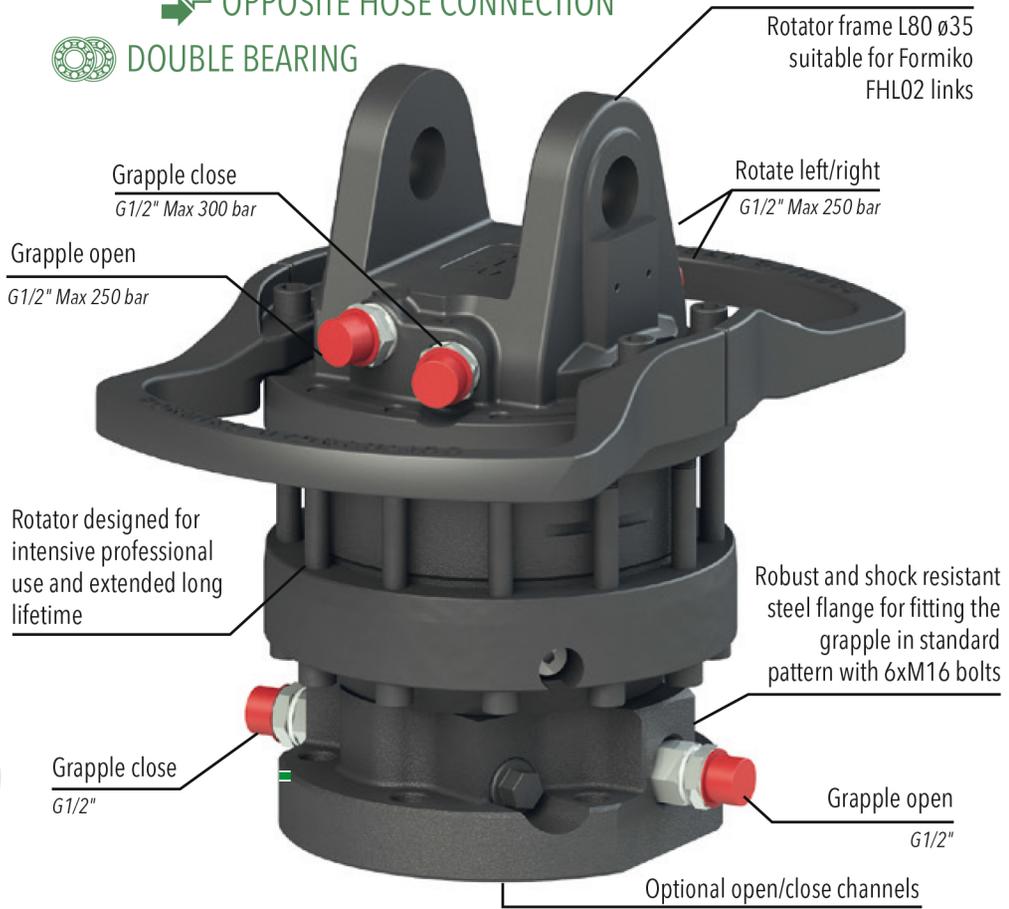

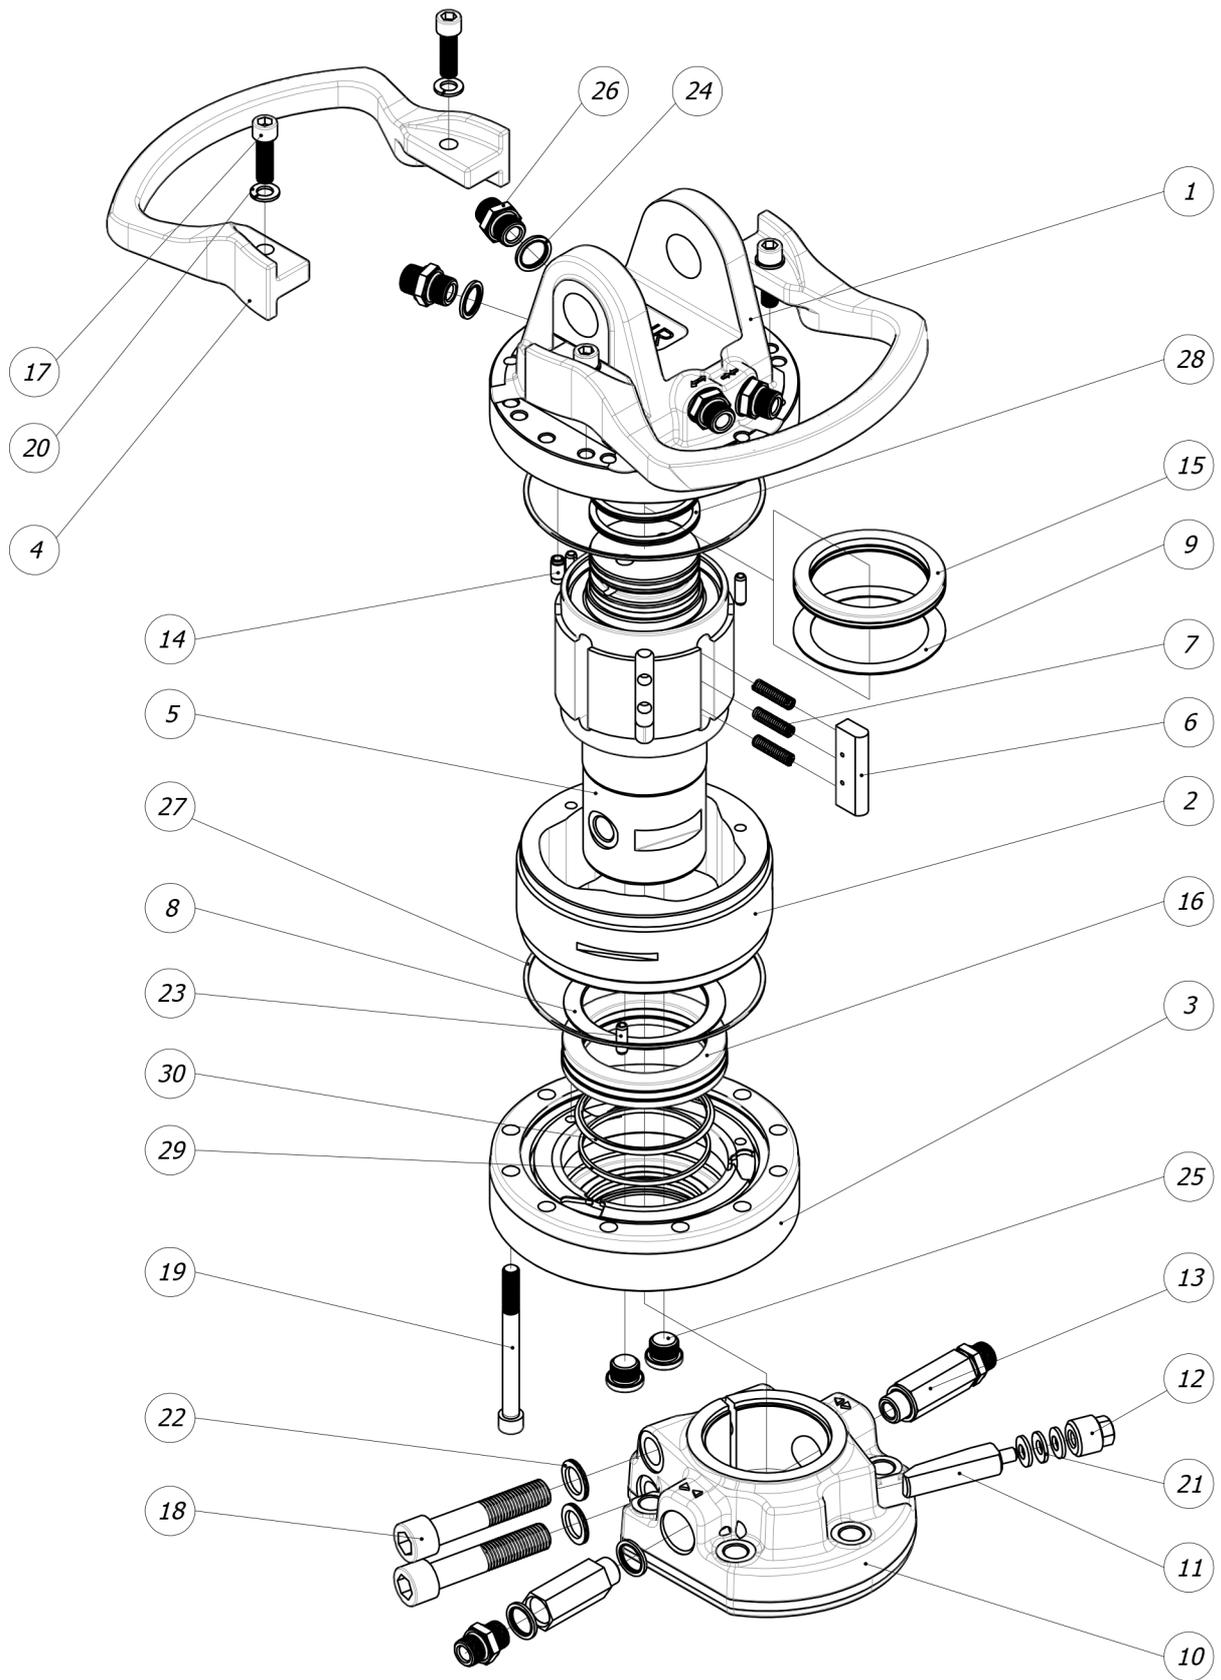

List of parts

Pos.	Part	Title	Quantity	Notes
1	10-2.001.01	Connector	1	
2	10.002.01	Stator frame	1	
3	10.003.01	Cover	1	
4	10.004.01	Guard	2	
5	10.005.01	Shaft	1	
6	10.006.01	Vane	8	
7	10.007.01	Spring	24	
8	10.008.01-1	Shim	1	
9	10.008.01-2	Shim	1	
10	16.010.01	Flange	1	
11	6.011.01	Wedge	1	
12	6.012.01	Stopper	1	
13	6.014.01	Nipple	2	
14	10.015.01	Restrictor	2	
15	102.03	Bearing	1	
16	102.04	Bearing	1	
17	201.02	Screw	4	
18	201.08	Screw	2	
19	201.09	Screw	12	
20	202.01	Spring washer	4	
21	202.02	Disc spring	3	
22	202.07	Washer	2	
23	204.04	Pin	4	
24	303.01	Bonded seal	8	
25	304.01	Plug	2	
26	401.02	Nipple	6	
Seal kit				
27	301.07	O - Ring	2	
28	302.09	Seal	2	
29	302.14	Seal	1	
30	302.19	Glide ring	1	